

Sensor-switched outdoor light

# L 930 LED

Anthracite

EAN 4007841 067199

Article number 067199



**LED**

30 years (Ø 4,5h / day)



3000K warm-white



infrared sensor 140°



max. 12 m



IP44



2/20 lux



2/15 min



manual override



energy saving

**3 JAHRE**  
HERSTELLER  
GARANTIE

steinel.de/garantie  
manufacturer's warranty  
steinel.de/garantie

## Function description

Magic lighting with aesthetic appeal. The 9 W sensor-switched outdoor light comes as an up/downlight in a classy aluminium look, and bathes building walls in warm white light (3000 K). The 140° IR sensor has a reach of 12 m. Added to this is the soft light start function and up to 4 h manual override for continuous light. Interconnectable by cable. Colour: anthracite. Ideal mounting height: 2 m.

# L 930 LED

Anthracite

EAN 4007841 067199

Article number 067199

## Technical specifications

Dimensions (L x W x H)	92 x 63 x 137 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	9 W
Interconnection	Yes
Type of interconnection	Master/master
Interconnection, number	10 lights max.
Slave modeselectable	No
Luminous flux	603 lm
Efficiency	67 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	140 °
Sneak-by guard	No
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No

Reach, radial	r = 2 m (5 m <sup>2</sup> ) / r = 4 m (20 m <sup>2</sup> )
Reach, tangential	r = 5 m (31 m <sup>2</sup> ) / r = 12 m (176 m <sup>2</sup> )
Photo-cell controller	Yes
Twilight setting	2 – 20 lx
Time setting	120 s – 15 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Basic light level function time	all/half night
Main light adjustable	No
Functions	Motions sensor, Light sensor, Normal / test mode, Orientation light
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Includes corner wall mount	No
includes sheet of self-adhesive numbers	No
Settings via	DIP switches
With remote control	No
Version	Anthracite
PU1, EAN	4007841067199

Sensor-switched outdoor light

# L 930 LED


Anthracite

EAN 4007841 067199

Article number 067199



## Detection Zone

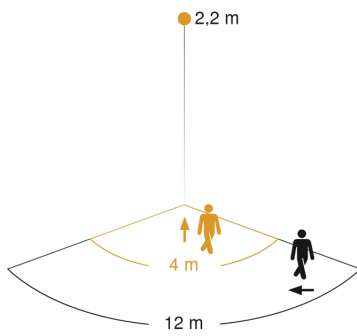

Mögliche Montagehöhe: 1,80 m – 2,50 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

